

SIGMA

LENS

CATALOGUE



LENS TECHNOLOGY

Sigma lens technology—what photographers always rely on when they want to express themselves through images.

Sigma is always developing state-of-the-art optical technology to draw out the maximum possibilities of single-lens reflex cameras and give photographers the tools they need to do exactly what they want, and the fruits of that development are embodied in each and every Sigma lens.



■ SIGMA High-Performance Lens Series

DC Lens

DC for DIGITAL

These are dedicated digital SLR camera lenses with an image circle designed to suit image sensors that correspond to APS-C size. In-house technology accumulated through the development of our digital SLR camera was used to optimize optical performance for our digital lenses. This is a high-performance lens series that fuses technology such as lens power layout and coating design with the know-how Sigma has built up over many years of developing interchangeable lenses for SLR cameras. By reducing the diameter of the image circle, Sigma has achieved a more compact, lightweight lens series.

* An image sensor larger than those corresponding to the APS-C size cannot be used in digital SLR cameras, 35 mm SLR cameras, or APS film SLR cameras. If such an element is used, vignetting will occur on the picture surface. The angle of view varies depending on which camera model the lens is used with. 35mm format is approximately 1.5 - 2.0 times the focal length of the lens being used.

DG Lens

DG for DIGITAL

These are high-performance lenses optimized for digital cameras. They are ideal not only for 35 mm digital SLR cameras and film digital SLR cameras but also for APS-C digital SLR cameras. They deliver superior image quality by correcting for all types of aberration, especially distortion, and they have high resolution capability because they minimize chromatic aberration of magnification, which is particularly a problem for digital cameras. What is more, these lenses incorporate optical designs optimized for digital cameras and Sigma's own Super Multi-Layer Coating technology, so they reduce flare and ghosting due to reflection between the image sensor and lens surfaces, and they provide high contrast and a wide range of tone. They also provide enough peripheral brightness with little vignetting.

■ SIGMA Advanced Lens Technology

EX Lens:

EX

With uncompromised design ideas and high-level optical technology and handling, these lenses, which are Sigma's representative lenses, meet the requirements of photographers at the highest level.

Aspherical Lens:

ASP.

The aspherical lens complex allows freedom of design, with high lens performance, reduced number of components, and compact size.

APO Lens:

APO

Using SLD, ELD, and other special low-dispersion glass, these lenses are designed to minimize chromatic aberration and deliver the best image quality possible.

Optical Stabilizer (OS):

OS

This is a feature built into lenses that compensates for camera shake. It dramatically expands the realms of photography by alleviating camera movement when shooting handheld.

Hyper-Sonic Motor (HSM):

HSM

HSM lenses are equipped with a motor driven by ultrasonic waves. The motor makes high AF speeds and quiet shooting a reality.

Rear Focus:

RF

RF lenses are equipped with a focusing system that moves the rear lens group for high-speed, silent focusing.

Inner Focus:

IF

IF lenses are equipped with a focusing system that moves the inner lens group without changing the physical length of the lens, thereby ensuring excellent stability in focusing.

Teleconverter-Compatible Lens (CONV):

CONV.

The "CONV" mark designates lenses that can be used with the APO Teleconverter EX (sold separately). The teleconverter increases the focal length and interfaces with the AE (automatic exposure) function of the lens.



DC LENS FOR DIGITAL SLR CAMERA

These lenses are specially designed to optimize the characteristics of APS-C digital SLR cameras. They have a reduced image circle for a compact and lightweight construction.

The angle of view varies depending on which camera model the lens is used with. 35mm format is approximately 1.5 - 2.0 times the focal length of the lens being used.




18-200mm F3.5-6.3 DC OS/HSM

DC FOR DIGITAL

10-20mm F4-5.6 EX DC
10-20mm F4-5.6 EX DC HSM

EX ASP. IF HSM

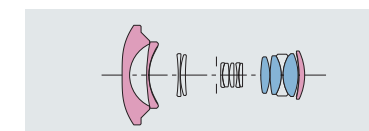


•Lens Construction; 10 Groups, 14 Elements
 •Minimum Focusing Distance; 24 cm (9.4 in.)
 •Magnification; 1:6.7 •Filter Size; ø 77 mm

This is an ultra-wide zoom lens for digital SLR camera use only, ideal for capturing the grandeur of landscapes and images with unique perspectives. Because it has a minimum focusing distance of only 24 cm, a small nearby subject can be shot against a far-off background. SLD (Special Low Dispersion) glass and aspherical lens elements are used for high image quality throughout the entire zoom range. The HSM model makes fast AF speeds and quiet shooting a reality.

DC FOR DIGITAL

17-70mm F2.8-4.5 DC MACRO
17-70mm F2.8-4.5 DC MACRO HSM

ASP. IF HSM

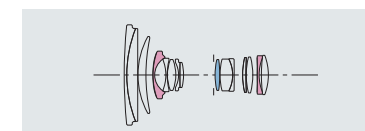

•Lens Construction; 12 Groups, 15 Elements
 •Minimum Focusing Distance; 20 cm (7.9 in.)
 •Magnification; 1:2.3 •Filter Size; ø 72 mm

This is a large-aperture standard zoom lens for digital cameras that has an open-aperture value of F2.8 (at 17 mm setting) and covers the most frequently used focal lengths. It can shoot subjects as close as 20 cm (7.9 inches) away, making it a powerful tool for close-up photography. It's also an ideal all-around lens for photographing subjects like landscapes, snapshots, and other everyday scenes. SLD (Special Low Dispersion) glass and aspherical lens elements are used for high image quality throughout the entire zoom range. A Super Multi-Layer Coating is used to reduce the occurrence of flare and ghosting and display high performance across the entire focusing range.

18-200mm F3.5-6.3 DC OS/HSM


In the drawing of the lens composition, the symbols mean the following: Aspherical lens SLD glass ELD glass.
 * Product pictures show Sigma SA mount lenses, appearance of the product may be different depending on the mount type.



17-70mm F2.8-4.5 DC MACRO

DC for DIGITAL
18-50mm F2.8 EX DC MACRO
18-50mm F2.8 EX DC MACRO HSM

EX ASP. IF HSM

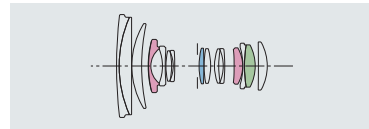


•Lens Construction; 13 Groups, 15 Elements
 •Minimum Focusing Distance; 20 cm (7.9 in.)
 •Magnification; 1:3 •Filter Size; ø 72 mm

This is a large-aperture standard zoom lens for digital camera use only, with a fast open-aperture value of F2.8 throughout the entire zoom range. SLD glass, ELD glass, and an aspherical lens enable this lens to be housed in a compact size and also maximize its performance. A Super Multi-Layer Coating is used to minimize the occurrence of flare and ghosting. The lens is ideal for snapshots but can handle a wide range of uses including portraits, group photos, architectural and landscape photography. It has a minimum focusing distance of 20 cm (7.9 inches) throughout the entire zoom range and a maximum magnification of 1:3.0, making it perfect for close-up photography.

DC for DIGITAL
18-200mm F3.5-6.3 DC

ASP. IF

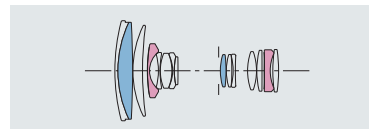


•Lens Construction; 13 Groups, 15 Elements
 •Minimum Focusing Distance; 45 cm (17.7 in.)
 •Magnification; 1:4.4 •Filter Size; ø 62 mm

This is a high-performance 11.1X zoom lens for digital camera use only. With an extended range from wide angle to telephoto, it can handle most kinds of shooting situations. SLD glass and aspherical lens elements deliver high image quality throughout the entire zoom range and enable the lens to be housed in a compact and lightweight construction. The minimum focusing distance of 45 cm (17.7 inches) at all focal lengths allows a maximum reproduction ratio of 1:4.4. It also has an inner focus system, so it accepts a Petal-type hood, which is excellent for blocking out extraneous light, as well as a circular polarizing filter. The lens also has a Zoom Lock function that prevents zoom creep due to its own weight.

DC for DIGITAL
18-50mm F3.5-5.6 DC
18-50mm F3.5-5.6 DC HSM

ASP. HSM

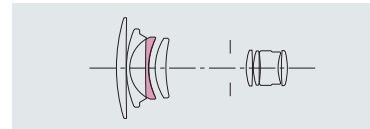


•Lens Construction; 8 Groups, 8 Elements
 •Minimum Focusing Distance; 25 cm (9.8 in.)
 •Magnification; 1:3.5 •Filter Size; ø 58 mm

This is a standard zoom lens for digital cameras with a compact and lightweight construction. It has excellent portability, so it reduces footwork. The use of aspherical lenses provide correction for all types of aberration and makes high-quality images a reality throughout the entire zoom range. High in practicality, it can beautifully capture a wide range of photo subjects. The lens has a minimum focusing distance of 25 cm (9.8 inches) at all focal lengths and is capable of macro photography with a maximum magnification of 1:3.5.

DC for DIGITAL
18-200mm F3.5-6.3 DC OS
18-200mm F3.5-6.3 DC OS HSM

ASP. IF OS HSM

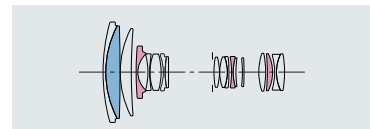


•Lens Construction; 13 Groups, 18 Elements
 •Minimum Focusing Distance; 45 cm (17.7 in.)
 •Magnification; 1:3.9 •Filter Size; ø 72 mm

This is a high-power zoom lens for digital cameras, equipped with Sigma's own Camera Shake Compensation OS (Optical Stabilizer) System. This lens allows you to take indoor and evening shots without worrying about camera shake. SLD glass and aspherical lens elements deliver high image quality throughout the entire zoom range. A Super Multi-Layer Coating is used to cut down on the occurrence of flare and ghosting. The lens has a minimum focusing distance of 45 cm (17.7 inches) at all focal lengths and a maximum photography magnification of 1:3.9. It also has an inner focus system, so accepts a Petal-type hood and a circular polarizing filter.

NEW DC for DIGITAL
APO 50-150mm F2.8 II EX DC HSM

EX APO IF HSM CONV.

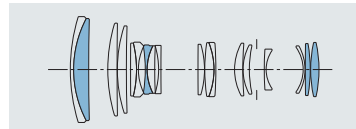


•Lens Construction; 14 Groups, 18 Elements
 •Minimum Focusing Distance; 100 cm (39.4 in.)
 •Magnification; 1:5.3 •Filter Size; ø 67 mm

This is a large-aperture telephoto zoom lens for digital camera use only, designed especially for portrait photography. It has an open-aperture value of F2.8, a minimum focusing distance of 1 m, and a maximum photography magnification of 1:5.3. The lens has the same compact, lightweight body and high image quality as before, but it now features even better performance when shooting close-up. An inner focusing system and inner zoom system are used for stable holding characteristics. The HSM model makes fast AF speeds and quiet shooting a reality, and it is also capable of full-time manual focus. It also accommodates optional APO Tele Converters.

NEW DC for DIGITAL
4.5mm F2.8 EX DC
CIRCULAR FISHEYE HSM

EX IF HSM

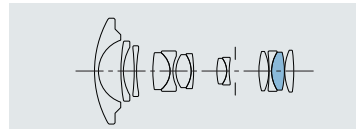


•Lens Construction; 9 Groups, 13 Elements
 •Minimum Focusing Distance; 13.5 cm (5.3 in.)
 •Magnification; 1:6 •Filter Type; Gelatin filter

The circular fisheye lens creates a circular image when used on a digital SLR camera. It's an ideal lens for landscapes and panoramic photography. Because of its equisolid angle projection system, the lens can be used for scientific applications. It has a minimum focusing distance of 13.5 cm (5.3 inches) and a maximum magnification of 1:6. SLD (Special Low Dispersion) glass is used for superior correction of chromatic aberration, and a Super Multi-Layer Coating is used to minimize the occurrence of flare and ghosting. The HSM model makes fast AF speeds and quiet shooting a reality, and includes full-time manual focus override.

DC for DIGITAL
30mm F1.4 EX DC
30mm F1.4 EX DC HSM

EX ASP. HSM

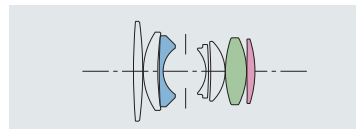


•Lens Construction; 7 Groups, 7 Elements
 •Minimum Focusing Distance; 40 cm (15.7 in.)
 •Magnification; 1:10.4 •Filter Size; ø 62 mm

This is a large-aperture standard lens for digital cameras, with a fast F1.4 aperture that makes handheld shooting in dim light possible. Using the out-of-focus effects of a shallow depth of field, the photographer can enjoy shooting snapshots, portraits, or landscapes. SLD (Special Low Dispersion) glass, ELD (Extraordinary Low Dispersion) glass, and aspherical lens elements are used to obtain the best possible correction for chromatic aberration and sharp image quality across the entire focusing range from 40 cm to infinity. The HSM model makes fast AF speeds and quiet shooting a reality, and includes full-time manual focus override.

DC for DIGITAL
55-200mm F4-5.6 DC
55-200mm F4-5.6 DC HSM

HSM

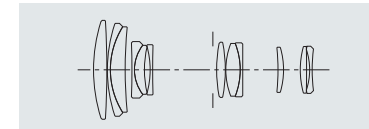


•Lens Construction; 9 Groups, 12 Elements
 •Minimum Focusing Distance; 110 cm (43.3 in.)
 •Magnification; 1:4.5 •Filter Size; ø 55 mm

This is a compact, lightweight telephoto zoom lens for digital camera use only, with the flexibility to handle a wide range of uses from portraits and snapshots to nature photography. With a compact body and excellent portability, the lens is light on its feet and makes shooting in the field an enjoyable experience. A Super Multi-Layer Coating is used to cut down on the occurrence of flare and ghosting, and the lens displays superior image quality throughout the entire zoom range.

NEW DC for DIGITAL
10mm F2.8 EX DC FISHEYE HSM

EX HSM

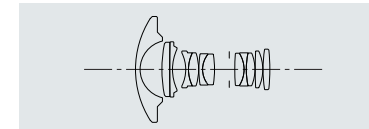

•Lens Construction; 7 Groups, 12 Elements
 •Minimum Focusing Distance; 13.5 cm (5.3 in.)
 •Magnification; 1:3.3 •Filter Type; Gelatin filter

This is a fisheye lens for digital cameras with an angle of view across the diagonal of 180° when used with a Nikon camera (or 154° with a Sigma camera or 167° with a Canon camera). This lens allows photographers to shoot creative images by taking advantage of the acute perspectives that are invisible to the human eye and the image distortion specific to fisheye lenses. A maximum magnification of 1:3.3 and minimum focusing distance of 13.5 cm (5.3 inches) allows it to focus on subjects that are only 1.8 cm away. It has a specially designed fixed hood and a Super Multi-Layer Coating to cut down on the occurrence of flare and ghosting and display excellent image quality.



WIDE ZOOM LENS

These are wide-angle zoom lenses that can zoom in and out to change the angle of view and perspective, thus adding a lot of appeal to photography. They are ideal for a wide range of applications, including building and landscape photography and commemorative photos of groups.




12-24mm F4.5-5.6 EX DG ASPHERICAL HSM

DG FOR DIGITAL

12-24mm F4.5-5.6 EX DG ASPHERICAL

12-24mm F4.5-5.6 EX DG ASPHERICAL HSM EX ASP IF HSM

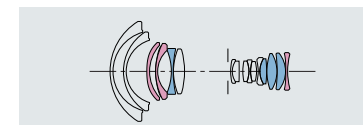

- Lens Construction: 12 Groups, 16 Elements
- Minimum Focusing Distance: 28 cm (11.0 in.)
- Magnification: 1:7.1 • Filter Type: Gelatin filter

This is an ultra-wide zoom lens that opens up a brand-new world of photography with an incredible angle of view of 122°. It can be used for a variety of subjects with little distortion, including vast landscapes, highrise buildings, and large groups of people. The ideal lens for digital SLR cameras, it is equipped with SLD (Special Low Dispersion) glass and aspherical lens elements to provide the utmost correction of chromatic and other types of aberration and to deliver superior image quality. The HSM model makes fast AF speeds and quiet shooting a reality, and includes full-time manual focus.

12-24mm F4.5-5.6 EX DG ASPHERICAL HSM

In the drawing of the lens composition, the symbols mean the following: ● Aspherical lens ● SLD glass ● ELD glass.
* Product pictures show Sigma SA mount lenses, appearance of the product may be different depending on the mount type.

WIDE LENS


These are lenses whose wide angle of view and short focusing distance can be utilized to create pictures brimming with individuality. With distinctive features such as bold image distortion and acute perspective, they give photographers the freedom to express what they want.



15mm F2.8 EX DG DIAGONAL FISHEYE

DG FOR DIGITAL 20mm F1.8 EX DG ASPHERICAL RF

EX ASP. RF

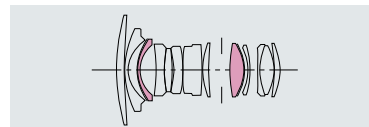


•Lens Construction; 11 Groups, 13 Elements
•Minimum Focusing Distance; 20 cm (7.9 in.)
•Magnification; 1:4 •Filter Size; ø 82 mm

With an angle of view of 94.5°, an open-aperture of F1.8, and a shallow depth of field, this super-wide-angle lens makes picture-taking a fun experience. Its fast F1.8 aperture makes handheld shooting in dim light possible, making it ideal for architectural, landscape and indoor photography. Designed for digital SLR cameras, it has a minimum focusing distance of 20 cm (7.9 inches) and a lens-to-subject working distance of 6.5 cm (2.6 inches), so it is perfect for close-up photography. The use of aspherical lens elements effectively correct all types of aberrations, minimize vignetting, and provide superior peripheral brightness. The rear focus system allows the use of a Petal-type hood.

DG FOR DIGITAL 24mm F1.8 EX DG ASPHERICAL MACRO

EX ASP.

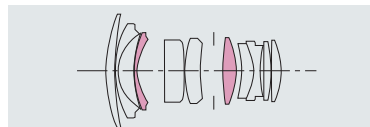

•Lens Construction; 9 Groups, 10 Elements
•Minimum Focusing Distance; 18 cm (7.1 in.)
•Magnification; 1:2.7 •Filter Size; ø 77 mm


This is a large-aperture wide-angle lens that gives photographers freedom of expression by allowing them to set the aperture they want and obtain effects such as beautiful out-of-focus images obtained with an open aperture. A maximum magnification of 1:2.7 and the use of a floating focus system enable a minimum shooting distance of 18 cm (7.1 inches), opening up the enjoyment of close-up photography. The use of aspherical lens elements effectively correct all types of aberrations, minimize vignetting, and provide superior peripheral brightness. The lens has a straight focusing system and comes equipped with a Petal-type hood. It can also be used with digital SLR cameras.



20mm F1.8 EX DG ASPHERICAL RF

DG FOR DIGITAL 28mm F1.8 EX DG ASPHERICAL MACRO

EX ASP.

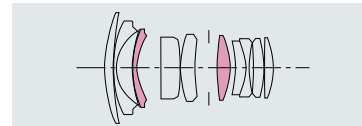


•Lens Construction; 9 Groups, 10 Elements
•Minimum Focusing Distance; 20 cm (7.9 in.)
•Magnification; 1:2.9 •Filter Size; ø 77 mm

This is a wide-angle lens with a fast open-aperture value of F1.8. A maximum magnification of 1:2.7 and the use of a floating focus system enable close-up photography with a minimum shooting distance of 20 cm (7.9 inches). The lens has a wide range of applications including landscape, architectural and portrait photography, and is optimized for use with digital SLR cameras. The use of aspherical lens elements effectively correct all types of aberrations, minimize vignetting, and provide superior peripheral brightness. The lens has a straight focusing system and comes equipped with a Petal-type hood.

DG FOR DIGITAL 8mm F3.5 EX DG CIRCULAR FISHEYE

EX

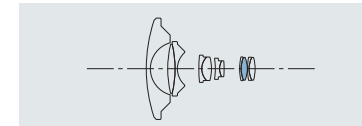


•Lens Construction; 6 Groups, 11 Elements
•Minimum Focusing Distance; 13.5 cm (5.3 in.)
•Magnification; 1:4.6 •Filter Type; Gelatin filter

This circular fisheye lens creates a circular image with a 180-degree angle of view. It has an open-aperture value of F3.5 and an auto-focus function. The image distortion specific to fisheye lenses can be used for creative expression. It has a minimum focusing distance of 13.5 cm (5.3 inches) and a maximum magnification of 1:4.6. The occurrence of flare and ghosting is minimized with a Super Multi-Layer Coating, and SLD (Special Low Dispersion) glass, ensuring excellent image quality and superior correction of chromatic aberration.

*A full circle can only be captured with full-frame 35 mm format digital SLR and film SLR cameras.

DG FOR DIGITAL 15mm F2.8 EX DG DIAGONAL FISHEYE

EX

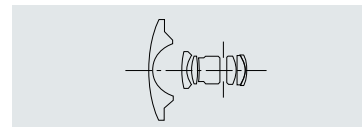

•Lens Construction; 6 Groups, 7 Elements
•Minimum Focusing Distance; 15 cm (5.9 in.)
•Magnification; 1:3.8 •Filter Type; Gelatin filter

This diagonal fisheye lens has an angle of view of 180° across the diagonal. By taking advantage of both the image distortion specific to fisheye lenses and the minimum focusing distance of 15 cm (5.9 inches), the photographer can shoot creative images. For example, a photo with an acute perspective can be taken by shooting a subject in the foreground against a background wider than the range of human vision. This lens has an insertion-type gelatin filter holder at the rear, so filter work is a snap.



STANDARD ZOOM LENS


Each standard zoom lens does the job of several lenses and can accurately express what the photographer wants.



24-60mm F2.8 EX DG

DG FOR DIGITAL 24-60mm F2.8 EX DG

EX ASP. 1F

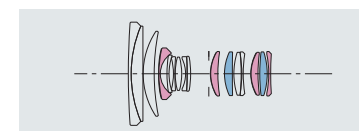


- Lens Construction; 15 Groups, 16 Elements
- Minimum Focusing Distance; 38 cm (15.0 in.)
- Magnification; 1:5.8 • Filter Size; ø 77 mm

This is a compact large-aperture standard zoom lens that takes a lot of footwork out of photography. It has an open-aperture value of F2.8 throughout the entire zoom range, so it can handle a wide range of scenes as a normal lens. Ideal for taking snapshots while traveling, this powerful unit also delivers high image quality in all kinds of photography, including landscapes, indoor photography, and children's portraits. It has a minimum focusing distance of 38 cm throughout the entire zoom range, and SLD (Special Low Dispersion) glass provides superior correction for all types of aberrations. The rear focus system allows the use of a Petal-type hood, and circular polarizing filters.

DG FOR DIGITAL 24-70mm F2.8 EX DG MACRO

EX ASP.

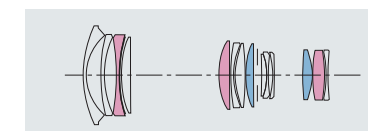

- Lens Construction; 13 Groups, 14 Elements
- Minimum Focusing Distance; 40 cm (15.7 in.)
- Magnification; 1:3.8 • Filter Size; ø 82 mm

This is a large-aperture zoom lens starting from 24 mm. With a fast open-aperture value of F2.8, it's the ideal lens when shooting indoors or in low light, and since it covers the normal focus area, it can handle a wide range of uses. SLD (Special Low Dispersion) glass and aspherical lens elements ensure excellent image quality and superior correction of all types of aberrations. The lens has a minimum focusing distance of 40 cm (15.7 inches) and allows macro photography with a maximum magnification of 1:3.8. The rear focus system eliminates the need for the front of the lens to rotate, thus allowing the use of circular polarizing filters and a Petal-type hood.




24-70mm F2.8 EX DG MACRO



28-300mm F3.5-6.3 DG MACRO

DG FOR DIGITAL
28-70mm F2.8 EX DG

EX ASP. IF

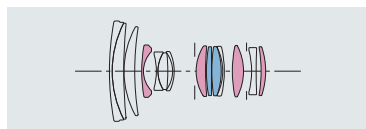


•Lens Construction; 12 Groups, 14 Elements
•Minimum Focusing Distance; 33 cm (13.0 in.)
•Magnification; 1:4.4 •Filter Size; ø 67 mm

This is a large-aperture standard zoom lens that can handle all kinds of scenes, including shooting portraits, landscapes and snapshots. This compact lens has an open-aperture value of F2.8 throughout the entire zoom range. SLD (Special Low Dispersion) glass and aspherical lens elements ensure excellent image quality and superior correction of all types of aberrations. The lens has a minimum focusing distance of 33 cm (13 inches) over the entire zoom range and a maximum magnification of 1:4.4. The rear focus system eliminates the need for the front of the lens to rotate, allowing the use of a Petal-type hood, and circular polarizing filters.

DG FOR DIGITAL
28-70mm F2.8-4 DG

ASP.

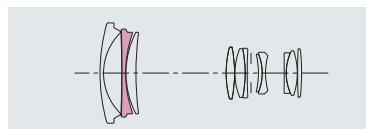


•Lens Construction; 8 Groups, 11 Elements
•Minimum Focusing Distance; 50 cm (19.7 in.)
•Magnification; 1:6.5 •Filter Size; ø 58 mm

This is a large-aperture standard zoom lens whose compact, lightweight construction makes it the ideal lens for travel. It has a large aperture of F2.8 (at the 28 mm setting), an overall length of 62.5 mm (2.5 inches), and weight of 255 g (9 oz.). The occurrence of flare and ghosting is minimized with a Super Multi-Layer Coating, and aspherical lens elements are used for superior correction of distortion aberrations. The lens has a minimum focusing distance of 50 cm (19.7 inches) throughout the entire zoom range and a maximum magnification of 1:6.5. It also has a zoom hood to provide sufficient depth in the telephoto range and prevent vignetting in the wide-angle range.

DG FOR DIGITAL
28-300mm F3.5-6.3 DG MACRO

ASP. IF

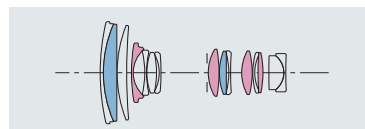

•Lens Construction; 13 Groups, 15 Elements
•Minimum Focusing Distance; 50 cm (19.7 in.)
•Magnification; 1:3 •Filter Size; ø 62 mm

This is a 10.7X high-performance zoom lens that can move from wide angle to telephoto and close-up in an instant. It has a compact size, with an overall length of 86 mm (3.4 inches), a maximum diameter of 74 mm (2.9 inches), and a filter size of 62 mm. It has a minimum focusing distance of 50 cm (19.7 inches) throughout the entire zoom range, and is capable of macro photography with a maximum magnification of 1:3 at the 300 mm setting. It frees the photographer from having to walk around with several lenses, making it ideal for traveling. SLD (Special Low Dispersion) glass and aspherical lens elements are used for optimum image quality, and a Zoom Lock function prevents zoom creep.

In the drawing of the lens composition, the symbols mean the following: Aspherical lens SLD glass ELD glass.
* Product pictures show Sigma SA mount lenses, appearance of the product may be different depending on the mount type.

TELEPHOTO ZOOM LENS

This is a lineup of telephoto zoom lenses that allow photographers to manipulate the distance between subject and lens and render powerful images with a strong sense of presence.

When it comes to dynamic shots of animal life or sports action, these lenses capture the essence of dramatic expression.




APO 120-300mm F2.8 EX DG HSM



APO 120-300mm F2.8 EX DG HSM

DG FOR DIGITAL APO 50-500mm F4-6.3 EX DG APO 50-500mm F4-6.3 EX DG HSM

EX APO RF HSM CONV.

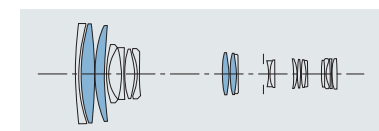


- Lens Construction; 16 Groups, 20 Elements
- Minimum Focusing Distance; 100-300 cm (39.4-118.1 in.)
- Magnification; 1:5.2 •Filter Size; ø 86 mm

This is a 10X high-performance zoom lens that covers the standard-to-super-telephoto range. This is the only lens photographers need to shoot a wide variety of subjects they can't get close to, such as airplanes and motor sports. SLD (Special Low Dispersion) glass and aspherical lens elements are used for superior correction of chromatic aberration, and a 7 lens-group zoom system ensures high performance throughout the entire zoom range. The HSM model makes fast AF speeds and quiet shooting a reality, and allows full-time manual focus. With an optional 2X APO Tele Converter, the lens becomes a 1000mm super-telephoto.

* With a teleconverter mounted on the lens, the zoom range is 100 mm - 500 mm.

NEW DG FOR DIGITAL APO 70-200mm F2.8 II EX DG MACRO HSM

EX APO IF HSM CONV.

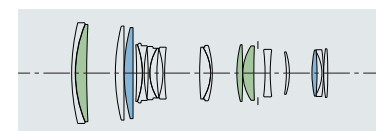


- Lens Construction; 15 Groups, 18 Elements
- Minimum Focusing Distance; 100 cm (39.4 in.)
- Magnification; 1:3.5 •Filter Size; ø 77 mm

This is a telephoto zoom lens with a large aperture of F2.8. It has the same minimum focusing distance of 100 cm (39.4 inches) and the same high close-up capabilities with a maximum magnification of 1:3.5 as the previous model, but its image quality is even better. SLD (Special Low Dispersion) glass and ELD (Extraordinary Low Dispersion) glass are used for superior correction of all types of aberration, and a Super Multi-Layer Coating is used to cut down on the occurrence of flare and ghosting and ensure optimum image quality throughout. The HSM model makes fast AF speeds and quiet shooting a reality, and allows full-time manual focus override. It also accommodates optional APO Tele Converters.

DG FOR DIGITAL APO 70-300mm F4-5.6 DG MACRO


APO

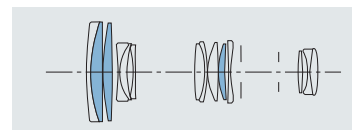

- Lens Construction; 10 Groups, 14 Elements
- Minimum Focusing Distance; 150 (95) cm (59.1 (37.4) in.)
- Magnification; 1:4.1 (1:2) •Filter Size; ø 58 mm

This is a high-performance telephoto zoom lens with superior image quality. It is capable of macro photography with a maximum magnification of 1:2 at the 300 mm focal length. It is equipped with a switch that reduces the minimum focusing distance at 150mm to 95 cm, and 1:2 macro photography is easily engaged without having to change lenses. This lens gives photographers a lot more freedom by allowing them to frame by zooming between the 200 mm and 300 mm settings even during macro photography. SLD (Special Low Dispersion) glass is used for superior correction of chromatic aberration and high image quality throughout the entire zoom range.

DG FOR DIGITAL 70-300mm F4-5.6 DG MACRO

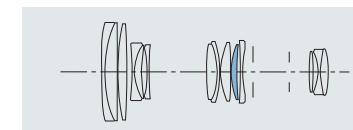


- Lens Construction; 10 Groups, 14 Elements
- Minimum Focusing Distance; 150 (95) cm (59.1 (37.4) in.)
- Magnification; 1:4.1 (1:2) •Filter Size; ø 58 mm

This is a telephoto zoom lens that offers value for money, excellent performance and is capable of macro photography with a maximum magnification of 1:2 at the 300 mm focal length. It also has a switch for changeover of focal lengths between 200 mm and 300 mm during macro photography. It handles not only close-up shots but also natural-looking portraits of subjects at a distance, as well as dynamic sports shots. SLD (Special Low Dispersion) glass is used for superior correction of chromatic aberration, and a Super Multi-Layer Coating is used to cut down on the occurrence of flare and ghosting and ensure high image quality throughout the entire zoom range.

DG FOR DIGITAL APO 100-300mm F4 EX DG APO 100-300mm F4 EX DG HSM

EX APO IF HSM CONV.

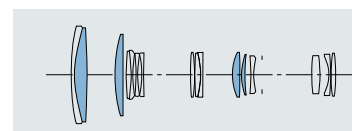

- Lens Construction; 14 Groups, 16 Elements
- Minimum Focusing Distance; 180 cm (70.9 in.)
- Magnification; 1:5 •Filter Size; ø 82 mm

This is a telephoto zoom lens that allows photographers to take advantage of a long focal length for effects such as shortening the perspective between the subject and background or blending subjects that are in and out of focus. Its performance has been optimized for digital SLR cameras, and SLD (Special Low Dispersion) glass is used for superior correction of chromatic aberration. The lens is easy to hold and use because its length does not change during focusing or zooming. The HSM model makes fast AF speeds and quiet shooting a reality, and is also capable of full-time manual focus.




APO 120-300mm F2.8 EX DG HSM

DG FOR DIGITAL

APO 120-300mm F2.8 EX DG HSM

EX APO IF HSM CONV.

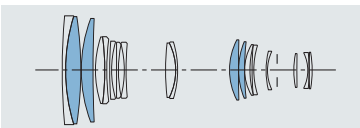


•Lens Construction; 16 Groups, 18 Elements
 •Minimum Focusing Distance; 150–250 cm (59.1–98.4 in.)
 •Magnification; 1:8.6 •Filter Size; ø 105 mm

We added a zoom to a well-established 300 mm F2.8 high-performance telephoto lens to create this large-aperture telephoto zoom lens with high mobility. The zoom function allows photographers to easily compose shots when they cannot change their shooting position, so is ideal for sports action, animals in the wild, and other decisive moments. It is also perfect for portraits as beautifully out-of-focus backgrounds are obtained with an open aperture of F2.8. SLD (Special Low Dispersion) glass is used for superior correction of chromatic aberration and high image quality throughout the entire zoom range. The lens is equipped with HSM for fast AF and quiet shooting with full-time manual focus.

NEW DG FOR DIGITAL

APO 120-400mm F4.5-5.6 DG OS HSM

APO OS RF HSM CONV.

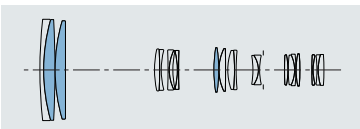


•Lens Construction; 15 Groups, 21 Elements
 •Minimum Focusing Distance; 150 cm (59.1 in.)
 •Magnification; 1:4.2 •Filter Size; ø 77 mm

This is a telephoto zoom lens equipped with Sigma's own Camera Shake Compensation OS (Optical Stabilizer) System. The Optical Stabilizer has two modes to choose from: Mode 1 is ideal for general photography, and Mode 2 is best for panning. With a minimum focusing distance of 150 cm and a maximum magnification of 1:4.2, the lens is a powerful tool for close-up photography. SLD (Special Low Dispersion) glass is used for correction of chromatic aberration, and the rear focusing system corrects for fluctuation of aberration due to focusing. The lens is equipped with HSM for fast and quiet AF with full-time manual focus. It also accommodates optional APO Tele Converters.

DG FOR DIGITAL

APO 300-800mm F5.6 EX DG HSM

EX APO IF HSM CONV.

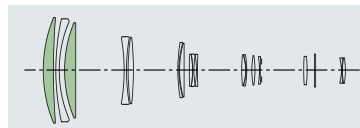


•Lens Construction; 16 Groups, 18 Elements
 •Minimum Focusing Distance; 600 cm (236.2 in.)
 •Magnification; 1:6.9 •Filter Size; ø 46 mm (Rear)

This lens covers the ultra-telephoto range up to 800 mm, bringing faraway subjects right in front of the camera. This is the lens for photographers who want to shoot sports action or the other side of the playing field events or capture the look on a mountain climber's face as he or she scales a high peak. The angle of view can be seamlessly changed from 8.2° to 3.1°, so the lens takes a lot of the footwork out of picture composition. It is equipped with HSM for fast AF speeds and quiet shooting, and is capable of full-time manual focus. With the addition of an optional 2X APO Tele Converter, the lens becomes a 600-1600 mm MF ultra-telephoto zoom lens.

NEW DG FOR DIGITAL

APO 150-500mm F5-6.3 DG OS HSM

APO OS RF HSM CONV.

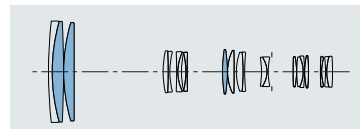

•Lens Construction; 15 Groups, 21 Elements
 •Minimum Focusing Distance; 220 cm (86.6 in.)
 •Magnification; 1:5.2 •Filter Size; ø 86 mm

This is an ultra-telephoto zoom lens that allows photographers to freely play with the ability of telephoto lenses to bring the subject closer and shorten perspective. It is equipped with Sigma's own Camera Shake Compensation OS (Optical Stabilizer) System, so handheld photography is worry-free. SLD (Special Low Dispersion) glass is used for superior correction of chromatic aberrations, and the rear focusing system effectively corrects for fluctuation of aberration due to focusing. The lens is equipped with HSM for fast AF speeds and quiet shooting, and is capable of full-time manual focus override. It also accommodates optional APO Tele Converters.

TELEPHOTO LENS

This is a lineup of telephoto lenses that bring faraway subjects right in front of the camera and create shots that make an impact.

Because of the compression effect of a long focal length, even space is part of the photographer's palette of expression.




APO 500mm F4.5 EX DG HSM

DG FOR DIGITAL

APO 500mm F4.5 EX DG

APO 500mm F4.5 EX DG HSM

EX APO IF HSM CONV.

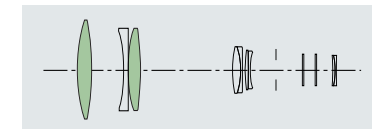

•Lens Construction; 8 Groups, 11 Elements
 •Minimum Focusing Distance; 400 cm (157.5 in.)
 •Magnification; 1:7.7 •Filter Size; ø 46 mm (Rear)


This is a large-aperture telephoto lens that can capture sharp images of fast-moving subjects, such as athletes in action and animals in the wild. ELD (Extraordinary Low Dispersion) glass is used to deliver sharp, high-contrast images across the entire aperture range. A Super Multi-Layer Coating is used to minimize the occurrence of flare and ghosting. The lens housing accommodates a rear insertion type filter with its own revolving ring, as well as a circular polarizing filter. The HSM model makes fast AF speeds and quiet shooting a reality, and is capable of full-time manual focus. It also accommodates optional APO Tele Converters.

DG FOR DIGITAL

APO 300mm F2.8 EX DG

APO 300mm F2.8 EX DG HSM

EX APO IF HSM CONV.

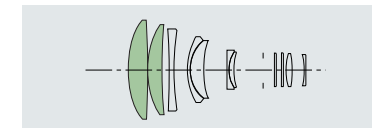

•Lens Construction; 9 Groups, 11 Elements
 •Minimum Focusing Distance; 250 cm (98.4 in.)
 •Magnification; 1:7.5 •Filter Size; ø 46 mm (Rear)


This is a high-performance telephoto lens with an established reputation. It can handle a wide range of uses, including sports, portraits, and telephoto photography. ELD (Extraordinary Low Dispersion) glass is used for maximum correction of chromatic aberration and for sharp, high-contrast images. A Super Multi-Layer Coating is used to minimize the occurrence of flare and ghosting. The HSM model makes fast AF speeds and quiet shooting a reality, and allows full-time manual focus. The lens takes a rear insertion type filter with its own revolving ring, as well as a circular polarizing filter. It also accommodates optional APO Tele Converters.

DG FOR DIGITAL

APO 800mm F5.6 EX DG

APO 800mm F5.6 EX DG HSM

EX APO IF HSM CONV.

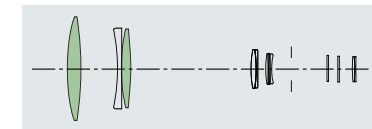

•Lens Construction; 9 Groups, 12 Elements
 •Minimum Focusing Distance; 700 cm (275.6 in.)
 •Magnification; 1:8.8 •Filter Size; ø 46 mm (Rear)

This is a large-aperture 800 mm lens that explores the visual effects of a super telephoto to the limit. ELD (Extraordinary Low Dispersion) glass is used to display high image quality across the entire aperture range. The lens housing accommodates a rear insertion type filter with its own revolving ring, as well as a circular polarizing filter. The inner focus system makes focusing a snap. The HSM model ensures fast and quiet AF with full-time manual focus override. It also accommodates optional APO Tele Converters. With an optional 2X APO Tele Converter, the lens becomes a 1600 mm MF ultra-telephoto zoom lens.

In the drawing of the lens composition, the symbols mean the following: (pink circle) Aspherical lens (blue circle) SLD glass (green circle) ELD glass. * Product pictures show Sigma SA mount lenses; appearance of the product may be different depending on the mount type.

MACRO LENS

Essential for close-up photography, macro lenses capture the drama of the small world around us. They open the door to the joys of discovering beautiful images that usually go unnoticed.




MACRO 70mm F2.8 EX DG



APO MACRO 150mm F2.8 EX DG HSM

DG FOR DIGITAL MACRO 50mm F2.8 EX DG

EX

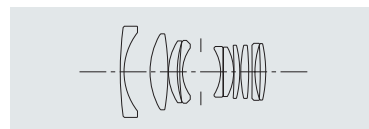


- Lens Construction; 9 Groups, 10 Elements
- Minimum Focusing Distance; 18.8 cm (7.4 in.)
- Magnification; 1:1 • Filter Size; ø 55 mm

This is a standard macro lens that is ideal for shooting accessories, fancy goods, and other subjects whose position needs to be finely adjusted. It uses a floating focus system that delivers high image quality from life-size shots to distant objects. Various types of aberration are optimally corrected even around the periphery of the image, and the lens excels in the representation of textured subjects. Besides macro photography, the lens has a wide range of uses, including general and landscape photography. It includes a screw-type round lens hood, so it can easily accommodate circular polarizing filters. An aperture of F45* is also provided for greater depth of field.

* F32 when used with a Nikon or Pentax camera.

DG FOR DIGITAL MACRO 70mm F2.8 EX DG

EX

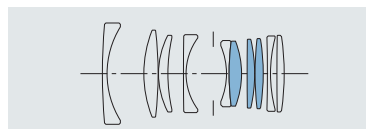


- Lens Construction; 9 Groups, 10 Elements
- Minimum Focusing Distance; 25.7 cm (10.1 in.)
- Magnification; 1:1 • Filter Size; ø 62 mm

This is a large-aperture medium macro lens suitable not only for shooting flowers, insects, and other members of the small world, but also for landscapes and portraits. Mounted on an APS-C size digital SLR camera, it delivers an angle of view equivalent to 105 mm. SLD (Special Low Dispersion) glass with a high refractive index and the latest optical design are used for sharp images, and a Super Multi-Layer Coating minimizes the occurrence of flare and ghosting. In addition, a floating focus system is used to keep in check fluctuation of aberrations due to the shooting distance, and to deliver high resolution and high image quality at all shooting distances.

DG FOR DIGITAL APO MACRO 150mm F2.8 EX DG HSM

EX APO IF HSM CONV.

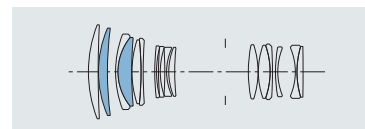


- Lens Construction; 12 Groups, 16 Elements
- Minimum Focusing Distance; 38 cm (15.0 in.)
- Magnification; 1:1 • Filter Size; ø 72 mm

This is a large-aperture telephoto macro lens with an open-aperture value of F2.8. The beautiful out-of-focus effects at open aperture can be used to highlight a subject and get all kinds of impressive shots. SLD (Special Low Dispersion) glass is used for superior correction of all types of aberration, and a floating focus system is used to deliver excellent image quality from life-size shots to distant objects. The lens is equipped with HSM and is capable of full-time manual focus. Images larger than life size can be obtained with the addition of an optional APO Tele Converter.

* Please see the specification chart for details of using this lens with the optional APO Tele Converters.

DG FOR DIGITAL APO MACRO 180mm F3.5 EX DG APO MACRO 180mm F3.5 EX DG HSM

EX APO IF HSM CONV.

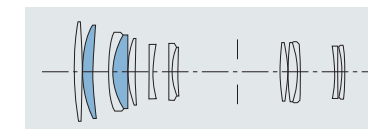

- Lens Construction; 10 Groups, 13 Elements
- Minimum Focusing Distance; 46 cm (18.1 in.)
- Magnification; 1:1 • Filter Size; ø 72 mm

This is a telephoto macro lens that is capable of life-size shots and allows photographers to shoot insects and small animals far enough away so that they are not disturbed. SLD (Special Low Dispersion) glass is used for the superior correction of all types of aberration, and a floating focus system is used to effectively correct for fluctuation of aberrations due to focusing, and to obtain high image quality at all shooting distances. The HSM model is capable of full-time manual focus. The range of use of the lens can be greatly expanded with the addition of an optional APO Tele Converter.

* Please see the specification chart for details of using this lens with the optional APO Tele Converters.

In the drawing of the lens composition, the symbols mean the following: ● Aspherical lens ● SLD glass ● ELD glass.
* Product pictures show Sigma SA mount lenses, appearance of the product may be different depending on the mount type.

LENS KNOWLEDGE

The more you know about lenses, the greater will be your enjoyment of photography.

The basics of lenses and lens technology--which play a key role in the creative process--are explained herein.




LENS TECHNOLOGY

•Aspherical Lens

This lens provides high optical performance while maintaining a compact size. For example, the 12-24 mm f/4.5-5.6 EX DG ASPHERICAL lens widens the range of wide-angle lenses, and it provides distortion-free images with image reproduction performance equivalent to that of a single-focal length lens. Aspherical lenses allow the production of high-quality images from compact, lightweight telephoto zoom lenses.

APO (APO Lens)

SIGMA's APO zoom lenses minimize color aberration. As the refractive index of glass depends on the wavelength of light, color aberration occurs when different colors form images at different points. This problem often occurs with telephoto lenses, but the Special Low-Dispersion (SLD) glass and Extraordinary Low Dispersion (ELD) used in SIGMA's APO lenses helps to compensate for color aberration, thereby allowing them to produce sharp images.

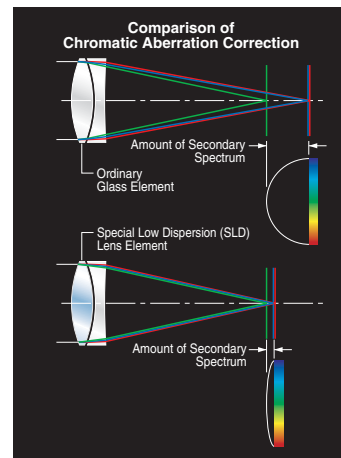

•APO MACRO

Although telephoto zoom lenses can be used closer to the object than fixed focal length telephoto lenses, there is still a minimum shooting distance. SIGMA has made this minimum distance smaller and developed the zoom MACRO lens for taking close-up photographs of the same quality as those taken with a regular MACRO lens, while maintaining the performance specific to an APO lens. Rather than carrying around the cumbersome accessories required for close-up work, the photographer can now take photographs at





a magnification of 1:2 (one half lifesize) using a telephoto lens, by quickly shifting from the normal setting to the full macro setting.

•Inner and Rear Focus



Conventional focusing has normally been performed by moving either all lens groups as a fixed unit or only the first lens group. AF cameras are now widely used, even for close-up photography. Consequently, demand has arisen for a focusing system that will keep the length of the lens unchanged while showing little fluctuation of aberration. In response to this demand, SIGMA has developed a new inner focus system that moves two lens groups inside the telephoto and telephoto MACRO lenses. This system has floating elements that substantially improve the close-up capability of the lens. The super wide angle lens having a large front-lens uses a rear focusing system to move the rear-lens apparatus and enhance the floating effect, and the 18-200mm F3.5-6.3 DC features an inner focusing system to move the secondary lens group during focusing. This lens has a minimum focusing distance of 45 cm / 17.7 inch throughout entire zoom range. The rear focus system ensures high-speed focusing with the wide lens 20mm F1.8 EX DG ASPHERICAL RF.

•Floating System

The floating system is used to control the focus. This system moves the different lens groups in the optical system to different positions, thereby

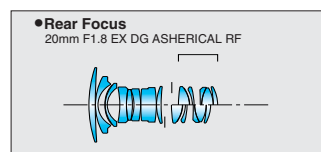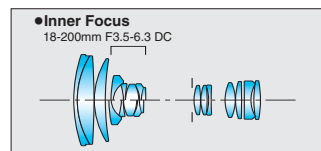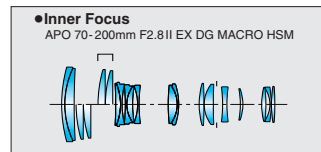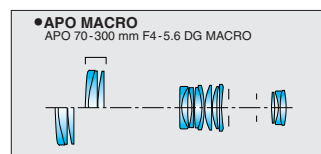

minimizing the telescoping distance and the fluctuation of aberration at different shooting distances. This system is particularly effective for macro lenses (which encompass a wide range of shooting distances) and wide-angle lenses (for Single-Lens Reflex cameras) whose lens composition is asymmetric. SIGMA uses the floating system for the MACRO 50 mm f/2.8 EX DG lens and the large-aperture wide-angle 28 mm f/1.8 EX DG ASPHERICAL MACRO lenses.

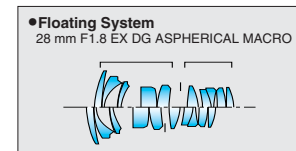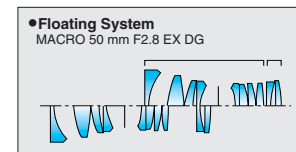

•DF (Dual Focus) System

The DF (Dual Focus) system disengages the linkage between the internal focusing mechanism and outer focusing ring when the focusing ring is moved to the AF position. This system provides easy and precise handling of the lens, since the focusing ring does not rotate during autofocus. The wide focusing ring also enables easy and accurate manual focusing.

•OS (Optical Stabilizer) Function

The OS function uses two sensors inside the lens to detect vertical and horizontal movement of the camera and works by moving an optical image stabilizing lens group to effectively compensate for camera shake. The OS function offers the equivalent of using a shutter speed 4 stops faster making it suitable for telephoto and low light photography.

As the stabilizing feature is built into the lens, it can be designed specifically to suit the characteristics of that lens. This provides precise compensation for camera shake throughout the entire zoom range. This also enables the correctly stabilized image to appear in the viewfinder aiding autofocus and composition.



Camera shake correction mechanism OFF



Camera shake correction mechanism ON

PRINCIPLES OF THE LENS

•Angle of View

The focal length determines the area in which objects can be reproduced on the image sensor surface. The angle of view is the area that the lens can photograph and is expressed in degrees. The angle of view indicated in the brochure is the angle relative to the diagonal line of 36 mm x 24 mm and 20.7 mm x 13.8 mm frames. As the focal length becomes larger, the field angle becomes smaller and the image larger.

•f Value (f-Number; f-Stop)

The aperture settings of a lens are called f-numbers or f-stops. An f-number represents a ratio between lens focal length and the effective diameter of a given aperture. Because it is related to focal length, the f-number is also called the relative aperture. The f-number equals the focal length of the lens divided by the entrance pupil of the aperture. Aperture settings are marked so that each position changes the amount of light passing through the lens by a factor of 2: the light is either doubled, or reduced by one-half. That is, a high number represents a smaller aperture, one that stops twice as much light as the previous aperture. Conversely, a lower number represents a larger aperture, one that increases light twice as much as the previous number. The speed of a lens is the f-number of its maximum effective diameter — i.e., when the aperture is wide open.

•Depth of Field

When you focus on an object, a certain area in front of and behind the object is also in focus; depth of field refers to the size of this area that is in focus. The depth of field or the range of focus becomes larger when you stop down (decrease the size of the aperture), or smaller when you open up (increase the size of the aperture). The depth of field is smaller at smaller shooting distances even when the aperture size remains unchanged, and is larger at larger shooting distances. The depth of field is also dependent on the focal length of the lens; it is larger for lenses of smaller focal lengths or wider angles, and smaller for lenses of larger focal lengths or telephoto lenses, if aperture and the distance camera to subject remain the same.



F2.8




F22

•Perspective

Depending on the focal length of the lens, the background appears close to or further away from the object. This visual effect is called perspective. With a wide-angle lens the background will appear remote, and the distance from the subject to the background will be emphasized; when the focal length of a telephoto lens is large, the background will appear to be closer to the object. To take advantage of this effect, use a wide-angle lens to capture both the background and the object, and a telephoto lens to emphasize only the object.

ANGLE OF VIEW AND FOCAL LENGTH

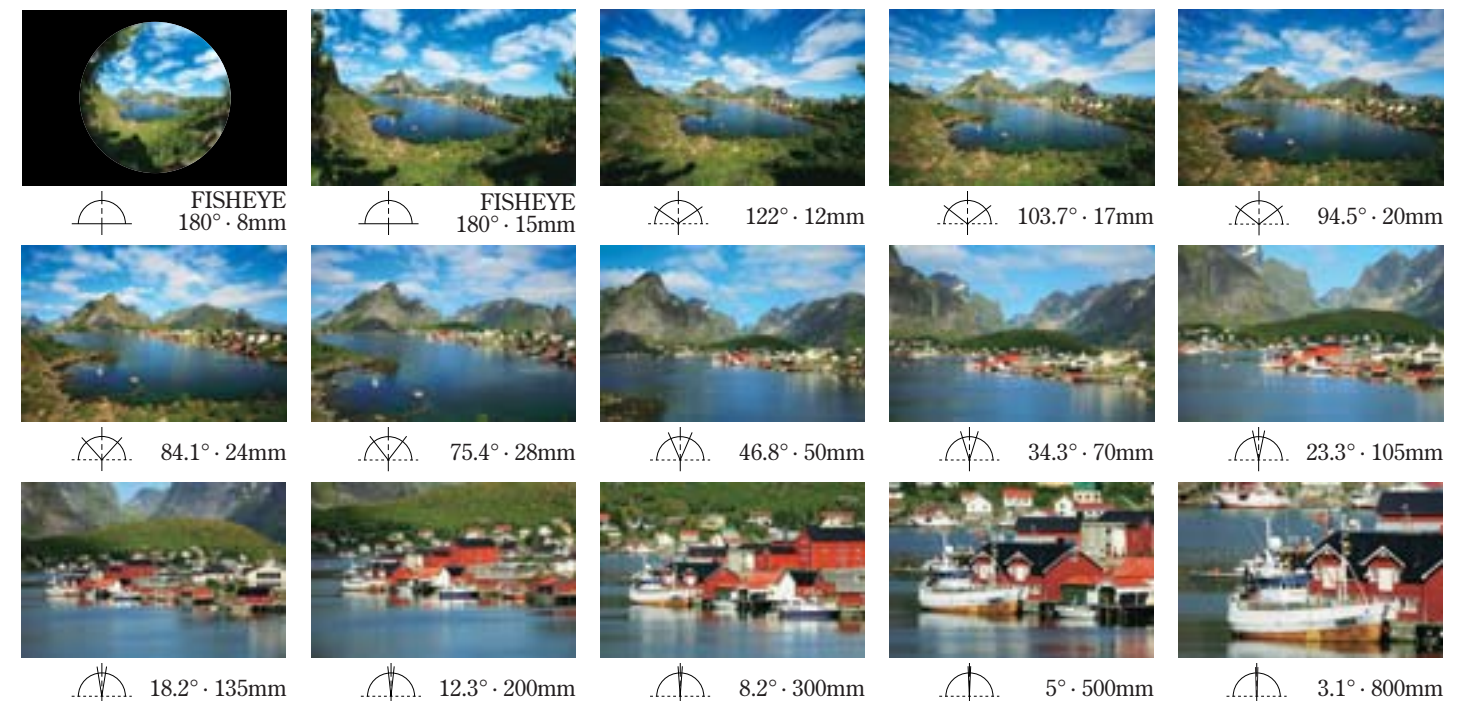

SIGMA LENS LINEUP & LENS ACCESSORIES

There's a Sigma lens for every idea photographers want to express.
Sigma Lens Line-up including Tele Converters & Lens Accessories.

DC LENS

10-20 mm F4-5.6 EX DC
10-20 mm F4-5.6 EX DC HSM
Lens case and Petal type lens hood (LH825-04) supplied.

17-70 mm F2.8-4.5 DC MACRO
17-70 mm F2.8-4.5 DC MACRO HSM
Petal type lens hood (LH780-04) supplied.

18-50 mm F2.8 EX DC MACRO
18-50 mm F2.8 EX DC MACRO HSM
Lens case and Petal type lens hood (LH780-04) supplied.

18-50 mm F3.5-5.6 DC
18-50 mm F3.5-5.6 DC HSM
Lens hood (LH630-02) supplied.

18-200 mm F3.5-6.3 DC
Petal type lens hood (LH680-01) supplied.

18-200 mm F3.5-6.3 DC OS
18-200 mm F3.5-6.3 DC OS HSM
Petal type lens hood (LH780-04) supplied.

APO 50-150mm F2.8 II EX DC HSM
Lens case, lens hood (LH732-01) supplied.

55-200 mm F4-5.6 DC
55-200 mm F4-5.6 DC HSM
Lens hood (LH595-01) supplied.

4.5mm F2.8 EX DC CIRCULAR FISHEYE HSM
Lens case supplied.

10mm F2.8 EX DC FISHEYE HSM
Lens case supplied.

30 mm F1.4 EX DC
30 mm F1.4 EX DC HSM
Lens case and Petal type lens hood (LH715-01) supplied.

ZOOM LENS

12-24 mm F4.5-5.6 EX DG ASPHERICAL
12-24 mm F4.5-5.6 EX DG ASPHERICAL HSM
Lens case supplied.

24-60 mm F2.8 EX DG
Lens case and Petal type lens hood (LH825-03) supplied.

24-70 mm F2.8 EX DG MACRO
Lens case and Petal type lens hood (LH875-02) supplied.

28-70 mm F2.8 EX DG
Lens case and Petal type lens hood (LH730-02) supplied.

28-70 mm F2.8-4 DG
Lens hood (LH630-01) supplied.

28-300 mm F3.5-6.3 DG MACRO
Petal type lens hood (LH680-01) supplied.

APO 50-500 mm F4-6.3 EX DG
APO 50-500 mm F4-6.3 EX DG HSM
Lens case, Petal type lens hood (LH935-01), shoulder strap and tripod socket (TS-31) supplied.

APO 70-200 mm F2.8 II EX DG MACRO HSM
Lens case, Petal type lens hood (LH850-01) and tripod socket (TS-21) supplied.

APO 70-300 mm F4-5.6 DG MACRO
Lens case, lens hood (LH635-01) supplied.

70-300 mm F4-5.6 DG MACRO
Lens hood (LH635-01) supplied.

APO 100-300 mm F4 EX DG
APO 100-300 mm F4 EX DG HSM
Lens case, Petal type lens hood (LH890-01) and tripod socket (TS-21) supplied.

APO 120-300 mm F2.8 EX DG HSM
Lens case, lens hood (LH1134-01), shoulder strap and tripod socket (TS-41) supplied.

APO 120-400mm F4.5-5.6 DG OS HSM
Lens case, lens hood (LH830-01), Shoulder Strap and tripod socket (TS-31) supplied.

APO 150-500mm F5-6.3 DG OS HSM
Lens case, lens hood (LH927-01), Shoulder Strap and tripod socket (TS-31) supplied.

APO 300-800 mm F5.6 EX DG HSM
Lens case, lens hood (LH1571-02), shoulder strap, and circular PL filter supplied. It is equipped with a fixed type tripod socket.

SINGLE FOCAL LENGTH LENS

8 mm F3.5 EX DG CIRCULAR FISHEYE
Lens case supplied.

15 mm F2.8 EX DG DIAGONAL FISHEYE
Lens case supplied.

20 mm F1.8 EX DG ASPHERICAL RF
Lens case and Petal type lens hood (LH875-02) supplied.

24 mm F1.8 EX DG ASPHERICAL MACRO
Lens case and Petal type lens hood (LH825-03) supplied.

28 mm F1.8 EX DG ASPHERICAL MACRO
Lens case and Petal type lens hood (LH825-03) supplied.

MACRO 50 mm F2.8 EX DG
Lens hood (LH550-02) supplied.

MACRO 70 mm F2.8 EX DG
Lens case, lens hood (LH620-01) supplied.

MACRO 105 mm F2.8 EX DG
Lens case, lens hood (LH580-03) supplied.

APO MACRO 150 mm F2.8 EX DG HSM
Lens case, lens hood (LH780-03) and tripod socket (TS-21) supplied.

APO MACRO 180 mm F3.5 EX DG
APO MACRO 180 mm F3.5 EX DG HSM
Lens case, lens hood (LH780-02) and tripod socket (TS-21) supplied.

APO 300 mm F2.8 EX DG
APO 300 mm F2.8 EX DG HSM
Lens case, lens hood (LH1196-01), circular PL filter and tripod socket (TS-21) supplied.

APO 500 mm F4.5 EX DG
APO 500 mm F4.5 EX DG HSM
Lens case, lens hood (LH1236-01), shoulder strap, and circular PL filter supplied. It is equipped with a fixed type tripod socket.

APO 800 mm F5.6 EX DG
APO 800 mm F5.6 EX DG HSM
Lens case, lens hood (LH1571-01), shoulder strap, and circular PL filter supplied. It is equipped with a fixed type tripod socket.

TELE CONVERTER CONV.

Please add 0085126 prefix in front of the UPC codes.

* APO TELE CONVERTER 1.4x EX DG
* APO TELE CONVERTER 2x EX DG

These APO Tele Converters are compatible with digital cameras, and when mounted between the lens and the camera body, they can increase the focal length of the lens by the power of 1.4 or 2. They are also compatible with the AF function, depending on the open-aperture F value of the lens being used, and they work with the AE (Automatic Exposure) function, dispensing with complicated exposure calculations. They increase maximum photography magnification by 1.4X or 2X, without any variation in the minimum focusing distance.

Please see SPECIFICATION for compatibility of Tele Converters.

APO TELE CONVERTER 1.4x EX DG	
for SIGMA	UPCcode:824402
for SONY	UPCcode:824211
for NIKON	UPCcode:824556
for PENTAX	UPCcode:824266
for CANON	UPCcode:824273

APO TELE CONVERTER 2x EX DG	
for SIGMA	UPCcode:876401
for SONY	UPCcode:876210
for NIKON	UPCcode:876555
for PENTAX	UPCcode:876265
for CANON	UPCcode:876272

LENS ACCESSORIES

◆ Lens hood

 LH550-02 UPCcode:922917	 LH580-03 UPCcode:257002	 LH595-01 UPCcode:520014	 LH620-01 UPCcode:924218	 LH630-01 UPCcode:920081	 LH630-02 UPCcode:521004
 LH635-01 UPCcode:501006	 LH680-01 UPCcode:917302	 LH715-01 UPCcode:923198	 LH730-02 UPCcode:580216	 LH732-01 UPCcode:924287	 LH780-02 UPCcode:103002
 LH780-03 UPCcode:922740	 LH780-04 UPCcode:923624	 LH825-03 UPCcode:916800	 LH825-04 UPCcode:510244	 LH835-01 UPCcode:723019	 LH840-01 UPCcode:921552
 LH850-01 UPCcode:924195	 LH875-02 UPCcode:916794	 LH890-01 UPCcode:527006	 LH925-01 UPCcode:733001	 LH935-01 UPCcode:914462	 LH1134-01 UPCcode:920951
 LH1196-01 UPCcode:194000	 LH1236-01 UPCcode:183004	 LH1571-01 UPCcode:151003	 LH1571-02 UPCcode:921637		

◆ SIGMA DG Filter

The new DG filters benefit from super multi-layer lens coatings, developed to counteract the highly reflective characteristics of digital image sensors, reducing both flare and ghosting. Black rimmed glass eliminates unnecessary internal reflections. New DG filters deliver high performance on both digital SLR cameras and film SLR cameras.

	52 mm	UPCcode:923693		52 mm	UPCcode:923808
	55 mm	UPCcode:923709		55 mm	UPCcode:923815
	58 mm	UPCcode:923716		58 mm	UPCcode:923822
	62 mm	UPCcode:923723		62 mm	UPCcode:923839
	67 mm	UPCcode:923730		67 mm	UPCcode:923846
	72 mm	UPCcode:923747		72 mm	UPCcode:923853
	77 mm	UPCcode:923754		77 mm	UPCcode:923860
	82 mm	UPCcode:923761		82 mm	UPCcode:923877
	86 mm	UPCcode:923778		86 mm	UPCcode:923884
	95 mm	UPCcode:923785		95 mm	UPCcode:923891
105 mm	UPCcode:923792	105 mm	UPCcode:923907		

◆ TRIPOD SOCKET

A Tripod Socket is used to attach telephoto lenses to a tripod. The tripod collar design enables quick release of the lens. The TS-41 is larger than the TS-21 tripod fitting, providing lenses with even more stability when used on a tripod. Please see SPECIFICATION for information of compatible lens models.

 TS-21 UPC code:566029	 TS-31 UPC code:918415	 TS-41 UPC code:529024
---	---	---

SPECIFICATION

The Major Distinguishing Characteristics of SIGMA Digital Lenses

AF (AUTO FOCUS)	AF Mount / UPC Code (please add 0085126 prefix in front)						APO Tele Converter		Lens Construction		Angle of view (SD format)	Number of blades in diaphragm	Minimum Aperture (wide)	Minimum Focusing Distance (cm / in.)	Magnification	Filter Size (ϕ mm)	Dimensions Diameter×Length (ϕ mm×mm/ ϕ in.×in.)	Weight (g / oz.)	Hood (included)
	for SIGMA	for Sony	for Nikon	for Pentax	for Canon	Four Thirds	1.4x	2x	Groups	Elements									
10–20mm F4–5.6 EX DC / HSM	201401 (H)	201340	201555 (H)	201609	201272 (H)	—	—	—	10	14	102.4°–63.8°	6	22	24 / 9.4	1:6.7	77	83.5×81 / 3.3×3.2	465 / 16.4	LH825-04
17–70mm F2.8–4.5 DC MACRO / HSM	669560	669348	689599 (H)	669607	669270	—	—	—	12	15	72.4°–20.2°	7	22	20 / 7.9	1:2.3	72	79×82.5 / 3.1×3.2	455 / 16.0	LH780-04
18–50mm F2.8 EX DC MACRO / HSM	581565	581343	582593 (H)	581602	581541	581589	—	—	13	15	69.3°–27.9°	7	22	20 / 7.9	1:3	72	79×85.7 / 3.1×3.4	450 / 15.9	LH780-04
18–50mm F3.5–5.6 DC / HSM	521400	521349	551551 (H)	521455	521271	521585	—	—	8	8	69.3°–27.9°	7	22	25 / 9.8	1:3.5	58	67.5×62 / 2.7×2.4	250 / 8.8	LH630-02
18–200mm F3.5–6.3 DC	777401	777340	777555 (M)	777456	777272	—	—	—	13	15	69.3°–7.1°	7	22	45 / 17.7	1:4.4	62	70×78.1 / 2.8×3.1	405 / 14.3	LH680-01
18–200mm F3.5–6.3 DC OS / HSM	888565	—	888558 (H)	—	888541	—	—	—	13	18	69.3°–7.1°	7	22	45 / 17.7	1:3.9	72	79×100 / 3.1×3.9	610 / 21.5	LH780-04
50–150mm F2.8 II APO EX DC HSM	691561 (H)	—	691554 (H)	—	691547 (H)	—	AF	AF	14	18	27.9°–9.5°	9	22	100 / 39.4	1:5.3	67	76.5×140.2 / 3.0×5.5	780 / 27.5	LH732-01
55–200mm F4–5.6 DC / HSM	684402	684341	685553 (H)	684457	684273	684587	—	—	9	12	25.5°–7.1°	8	22	110 / 43.3	1:4.5	55	71.5×87.1 / 2.8×3.4	310 / 10.9	LH595-01
4.5mm F2.8 EX DC CIRCULAR FISHEYE HSM	486563 (H)	—	486556 (H)	—	486549 (H)	—	—	—	9	13	180°	6	22	13.5 / 5.3	1:6	**	76.2×77.8 / 3.0×3.1	470 / 16.6	—
10mm F2.8 EX DC FISHEYE HSM	477561 (H)	—	477554 (H)	—	477547 (H)	—	—	—	7	12	154°	7	22	13.5 / 5.3	1:3.3	**	75.8×83.1 / 3.0×3.3	475 / 16.8	—
30mm F1.4 EX DC / HSM	300401 (H)	300340	300555 (H)	300609	300272 (H)	300586 (H)	—	—	7	7	45°	8	16	40 / 15.7	1:10.4	62	76.6×59 / 3.0×2.3	400 / 14.1	LH715-01

•All Nikon and Sony mounts are compatible with D type cameras. The (H) symbol in the UPC code indicates a HSM lens. The Nikon mount (M) lenses are incorporated with a built-in AF motor.
•Vignetting will occur if the lens is used with digital cameras with image sensors larger than APS-C size or 35 mm SLR cameras, APS Film cameras.

•The minimum shooting distance is measured from the image plane. •The data for maximum diameter x length, weight and minimum aperture setting (f/-stop) was obtained using a SIGMA mount. •The angle of view varies depending on the camera the lens is mounted on.

The Major Distinguishing Characteristics of SIGMA Lenses

AF (AUTO FOCUS)	AF Mount / UPC Code (please add 0085126 prefix in front)						APO Tele Converter		Lens Construction		Angle of view (35 mm format)	Angle of view (SD format)	Number of blades in diaphragm	Minimum Aperture (wide)	Minimum Focusing Distance (cm / in.)	Magnification	Filter Size (ϕ mm)	Dimensions Diameter×Length (ϕ mm×mm/ ϕ in.×in.)	Weight (g/oz.)	Hood (included)	Tripod Socket (* indicates included with the lens)
	for SIGMA	for Sony	for Nikon	for Pentax*	for Canon	Four Thirds	1.4x	2x	Groups	Elements											
12–24mm F4.5–5.6 EX DG ASPHERICAL / HSM*	200404 (H)	200343 (D)	200558 (H)	200459	200275 (H)	—	—	—	12	16	122°–84.1°	92.1°–54.8°	6	22	28 / 11.0	1:7.1	**	87×102.5 / 3.4×4.0	600 / 21.2	—	—
24–60mm F2.8 EX DG *3	547400	547349 (D)	547448	547455	547271	—	—	—	15	16	84.1°–39.6°	54.8°–23.4°	9	22	38 / 15.0	1:5.8	77	83.6×87.2 / 3.3×3.4	550 / 19.4	LH825-03	—
24–70mm F2.8 EX DG MACRO	548407	548346 (D)	548445	548452	548278	—	—	—	13	14	84.1°–34.3°	54.8°–20.2°	9	32	40 / 15.7	1:3.8	82	88.7×115.5 / 3.5×4.5	715 / 25.2	LH875-02	—
28–70mm F2.8 EX DG *2	549404	549343 (D)	549442	549459	549275	—	—	—	12	14	75.4°–34.3°	47.9°–20.2°	9	22	33 / 13.0	1:4.4	67	74×87.2 / 2.9×3.4	510 / 18.0	LH730-02	—
28–70mm F2.8–4 DG	634407	634346 (D)	634445	634452	634278	—	—	—	8	11	75.4°–34.3°	47.9°–20.2°	8	22	50 / 19.7	1:6.5	58	67.5×62.5 / 2.7×2.5	255 / 9.0	LH630-01	—
28–300mm F3.5–6.3 DG MACRO	795405	795344 (D)	795443	795450	795276	—	—	—	13	15	75.4°–8.2°	47.9°–4.7°	8	22	50 / 19.7	1:3	62	74×86 / 2.9×3.4	490 / 17.3	LH680-01	—
50–500mm F4–6.3 APO EX DG / HSM*	736408 (H)	736347	736552 (H)	736453	736279 (H)	736583 (H)	MF*	MF*	16	20	46.8°–5°	27.9°–2.9°	9	22	100–300 / 39.4–118.1	1:5.2	86	95×218.5 / 3.7×8.6	1,840 / 64.9	LH935-01	TS-31 *
70–200mm F2.8 II APO EX DG MACRO HSM *	579562 (H)	—	579555 (H)	—	579548 (H)	—	AF	AF	15	18	34.3°–12.3°	20.2°–7.1°	9	22	100 / 39.4	1:3.5	77	86.5×184.4 / 3.4×7.3	1,370 / 48.3	LH850-01	TS-21 *, TS-41
70–300mm F4–5.6 APO DG MACRO *	508401	508340	508555 (M)	508456	508272	—	—	—	10	14	34.3°–8.2°	20.2°–4.7°	9	22	150*(95) / 59.1*(37.4)	1:4.1*(1:2)	58	76.6×122 / 3.0×4.8	550 / 19.4	LH635-01	—
70–300mm F4–5.6 DG MACRO *	509408	509347	509552 (M)	509453	509279	—	—	—	10	14	34.3°–8.2°	20.2°–4.7°	9	22	150*(95) / 59.1*(37.4)	1:4.1*(1:2)	58	76.6×122 / 3.0×4.8	545 / 19.2	LH635-01	—
100–300mm F4 APO EX DG / HSM	134563 (H)	134341 (D)	134556 (H)	134457	134549 (H)	—	AF	MF	14	16	24.4°–8.2°	14.2°–4.7°	9	32	180 / 70.9	1:5	82	92.4×226.5 / 3.6×8.9	1,440 / 50.8	LH890-01	TS-21 *, TS-41
120–300mm F2.8 APO EX DG HSM	135560 (H)	—	135553 (H)	—	135546 (H)	—	AF	AF	16	18	20.4°–8.2°	11.8°–4.7°	9	32	150–250 / 59.1–98.4	1:8.6	105	112.8×271 / 4.4×10.7	2,680 / 94.5	LH1134-01	TS-41 *, TS-21
120–400mm F4.5–5.6 APO DG OS HSM	728564 (H)	—	728557 (H)	—	728540 (H)	—	MF	MF	15	21	20.4°–6.2°	11.8°–3.6°	9	22	150 / 59.1	1:4.2	77	92.5×203.5 / 3.6×8.0	1,750 / 61.7	LH830-01	TS-31 *
150–500mm F5–6.3 APO DG OS HSM	737566 (H)	—	737559 (H)	—	737542 (H)	—	MF	MF	15	21	16.4°–5°	9.5°–2.9°	9	22	220 / 86.6	1:5.2	86	94.7×252 / 3.6×9.9	1,910 / 67.4	LH927-01	TS-31 *
300–800mm F5.6 APO EX DG HSM	595562 (H)	—	595555 (H)	—	595548 (H)	595586 (H)	MF*	MF*	16	18	8.2°–3.1°	4.7°–1.8°	9	32	600 / 236.2	1:6.9	46 (Rear)	156.5×544 / 6.2×21.4	5,880 / 207.4	LH1571-02	—
8mm F3.5 EX DG CIRCULAR FISHEYE *2	485405	485344 (D)	485597	485603	485276	—	—	—	6	11	180°	180°	6	22	13.5 / 5.3	1:4.6	**	73.5×68.6 / 2.9×2.7	400 / 14.1	—	—
15mm F2.8 EX DG DIAGONAL FISHEYE	476403	476342	476441	476458	476274	—	—	—	6	7	180°	98.0°	7	22	15 / 5.9	1:3.8	**	73.5×65 / 2.9×2.6	370 / 13.0	—	—
20mm F1.8 EX DG ASPHERICAL RF	411404	411343 (D)	411442	411459	411275	—	—	—	11	13	94.5°	63.8°	9	22	20 / 7.9	1:4	82	88.6×89.5 / 3.5×3.5	520 / 18.3	LH875-02	—
24mm F1.8 EX DG ASPHERICAL MACRO	432409	432348 (D)	432447	432454	432270	432584	—	—	9	10	84.1°	54.8°	9	22	18 / 7.1	1:2.7	77	83.6×82.5 / 3.3×3.2	485 / 17.1	LH825-03	—
28mm F1.8 EX DG ASPHERICAL MACRO	440404	440343 (D)	440442	440459	440275	—	—	—	9	10	75.4°	47.9°	9	22	20 / 7.9	1:2.9	77	83.6×82.5 / 3.3×3.2	500 / 17.6	LH825-03	—
50mm F2.8 EX DG MACRO	346409	346348	346447	346454	346270	—	—	—	9	10	46.8°	27.9°	7	45	18.8 / 7.4	1:1	55	71.4×66.5 / 2.8×2.6	320 / 11.3	LH550-02	—
70mm F2.8 EX DG MACRO *2	270568	270346 (D)	270599	270605	270544	—	—	—	9	10	34.3°	20.2°	9	22	25.7 / 10.1	1:1	62	76×95 / 3.0×3.7	525 / 18.5	LH620-01	—
105mm F2.8 EX DG MACRO	257408	257347	257446	257453	257279	257583	—	—	10	11	23.3°	13.5°	8	45	31.3 / 12.3	1:1	58	74×97.5 / 2.9×3.8	460 / 16.2	LH580-03	—
150mm F2.8 APO MACRO EX DG HSM *	104566 (H)	—	104559 (H)	—	104542 (H)	104580 (H)	AF*(MF)*	MF*	12	16	16.4°	9.5°	9	22	38 / 15.0	1:1	72	79.6×137 / 3.1×5.4	895 / 31.6	LH780-03	TS-21 *, TS-41
180mm F3.5 APO MACRO EX DG / HSM	105563 (H)	105341	105556 (H)	105457	105549 (H)	—	AF*(MF)	MF	10	13	13.7°	7.9°	9	32	46 / 18.1	1:1	72	80×182 / 3.1×7.2	965 / 34.0	LH780-02	TS-21 *, TS-41
300mm F2.8 APO EX DG / HSM	195564 (H)	195342	195557 (H)	195458	195540 (H)	—	AF	AF	9	11	8.2°	4.7°	9	32	250 / 98.4	1:7.5	46 (Rear)	119×214.5 / 4.7×8.4	2,400 / 84.6	LH1196-01	TS-21 *, TS-41
500mm F4.5 APO EX DG / HSM	184568 (H)	184346	184551 (H)	184452	184544 (H)	—	MF	MF	8	11	5°	2.9°	9	32	400 / 157.5	1:7.7	46 (Rear)	123×350 / 4.8×13.8	3,150 / 111.1	LH1236-01	—
800mm F5.6 APO EX DG / HSM	152567 (H)	152345	152550 (H)	152451	152543 (H)	—	MF	MF	9	12	3.1°	1.8°	9	32	700 / 275.6	1:8.8	46 (Rear)	156.5×521 / 6.2×20.5	4,900 / 172.8	LH1571-01	—

•(H) means an HSM type lens. The Nikon mount (M) lenses are incorporated with a built-in AF motor. Sony mount (D) lenses in the UPC code are compatible with D type cameras. All Nikon mounts are compatible with D type cameras. *Pentax mount lenses are not fully compatible with Pentax SF-X and SF7. *Four Thirds mount of tele converter is not available.

•Teleconverter; [*1] is capable of autofocus from 0.52m (20.5 inches) — infinity, and [*2] is capable of autofocus from 1.2m (47.2 inches) — infinity (corresponding AF mount : Sigma, Nikon, and Canon). Depending on the camera model some restrictions of functions may apply. Also, some functions may be restricted by certain models of camera bodies. •An asterisk (*) indicates the maximum magnification and the minimum shooting distance when the built-in macro mode is used. •The minimum shooting distance is measured from the film surface. •The data for maximum diameter x length, weight and minimum aperture setting (f/-stop) was obtained using a SIGMA mount. Specification varies depending on mount type. •All SIGMA lens mounts are for Sigma lenses only and are fixed. They are compatible with all functions including AE programs. •Lenses of f/5.6

•If digital SLR cameras are used, the angle of view varies depending on the camera. •The appearance and specifications are subject to change without notice.

or smaller aperture cannot be used for autofocus with the Nikon F-501 or F-401 (exceptions are the F-401S and the F-401X). •AF lenses have different appearances depending on the corresponding mount. •(H) and (M) equipped models of Nikon AF lenses allow auto-focus photography with Nikon Digital SLR cameras as well as Nikon F6, F5, F4 series, F100, F90, F90X, F80, F70, u2, u, PRONEA 600, PRONEA S, FUJIFILM FinePix S2

Pro, S3 Pro, S5 Pro, KODAK DCS Pro 14n and DCS Pro SLR/n. In other cases, focusing is done manually. Lenses indicated with [*1] Nikon, [*2] Nikon and Pentax, and [*3] Pentax marks, show that these lenses do not have an aperture ring, therefore depending on Camera model some functions may not work. •An asterisk (*) indicates the filter for a type of lens that allows insertion of a gelatin filter into rear of the lens.



Caution: To ensure the correct and safe use of the product, be sure to read the User's Manual carefully prior to operation.

SIGMA

■ SIGMA CORPORATION

2-4-16 Kurigi Asao-ku Kawasaki-shi, Kanagawa 215-8530
Tel.81-44-989-7437 Fax.81-44-989-7448

■ SIGMA World Network (HOMEPAGE & E-MAIL ADDRESS)

http://www.sigma-benelux.nl (Dutch)	E-Mail: foto@sigma-benelux.nl (Benelux)
http://www.sigma-photo.fr (French)	E-Mail: sigma@sigma-photo.fr (France)
http://www.sigma-foto.de (German)	E-Mail: info@sigma-foto.de (Germany)
http://www.sigma.com.hk (Chinese)	E-Mail: info@sigma.com.hk (Hong Kong)
http://www.sigma-photo.co.jp (Japanese)	E-Mail: intl@sigma-photo.co.jp (Japan)
http://www.sigma-imaging-uk.com (English)	E-Mail: sales@sigma-imaging-uk.com (U.K.)
http://www.sigma-photo.com (English)	E-Mail: info@sigmaphoto.com (U.S.A)
	E-Mail: support@apds.com.sg (Singapore)